




300.20.40, 300.20.41, 300.20.45, 300.20.46 LED Illuminated Mirror

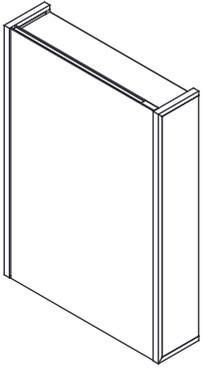


300.20.40

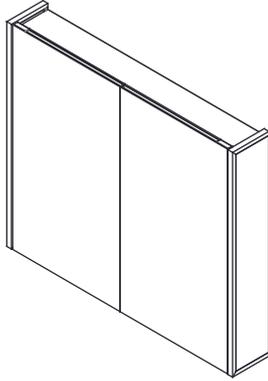

300.20.41

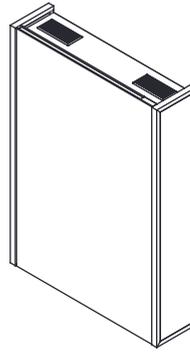

300.20.45

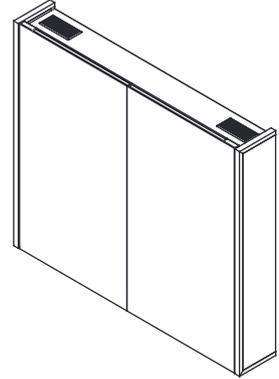

300.20.46

Thank you for purchasing our product.

Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.

Please retain it for future reference.

Handle with care! When unpacked, never place upright on a hard surface eg. Tile Floor. Always lay on soft surface.




To avoid the risk of electrocution, please turn off the electricity mains supply before commencing the installation.

Please do not hang or drape any clothes or material on the mirrors as the bulbs get very hot and this will cause a fire!

Please also do not place objects too close to the bulbs as this will cause them to burn or melt the object!


1.



1X



7X



2X







6X







1X

3.

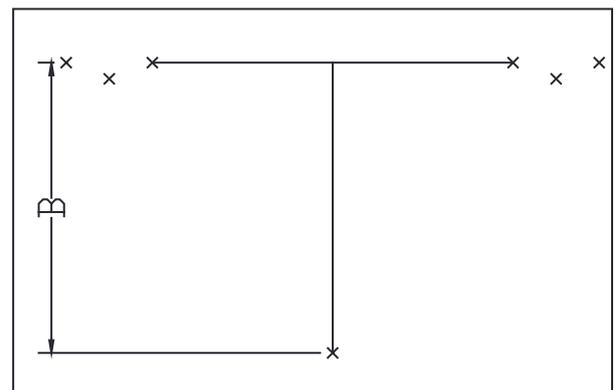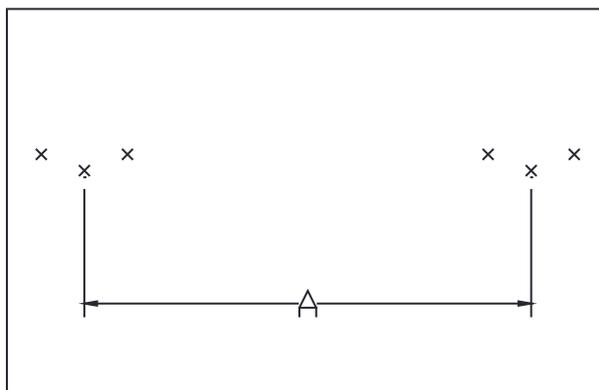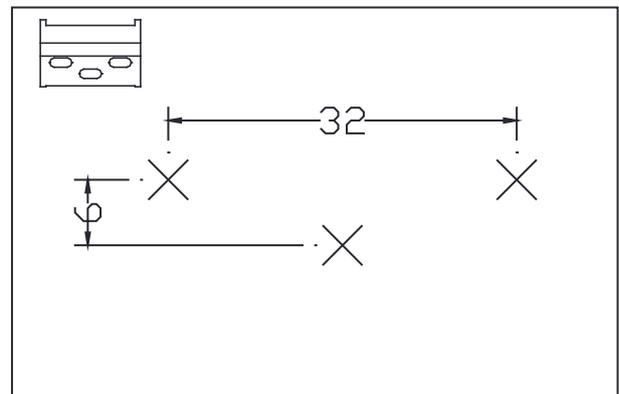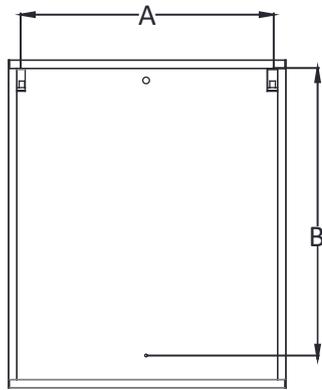


Art No \ Distance	A(mm)	B(mm)
300.20.40	410	526
300.20.41	475	526
300.20.45	726	526
300.20.46	726	526

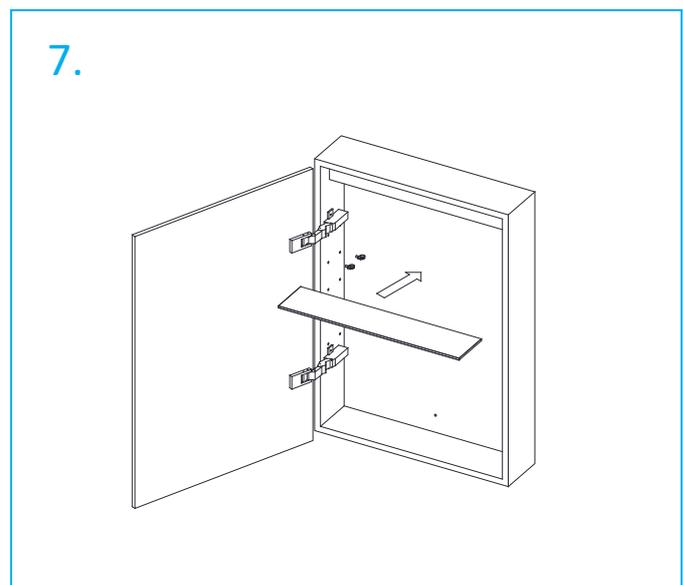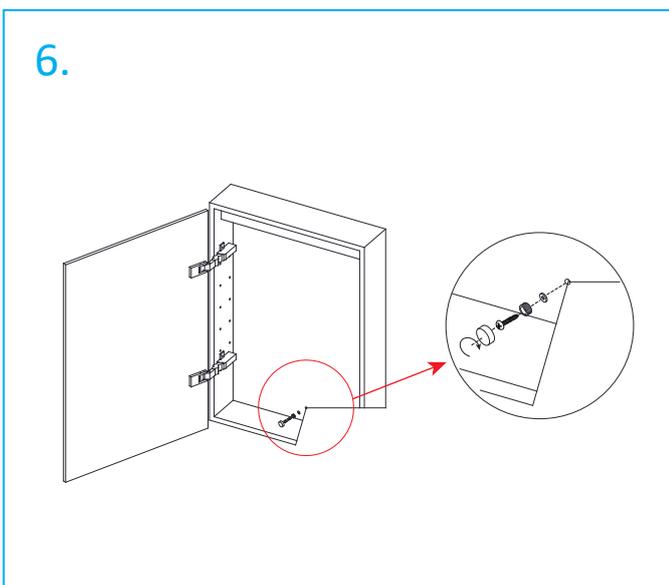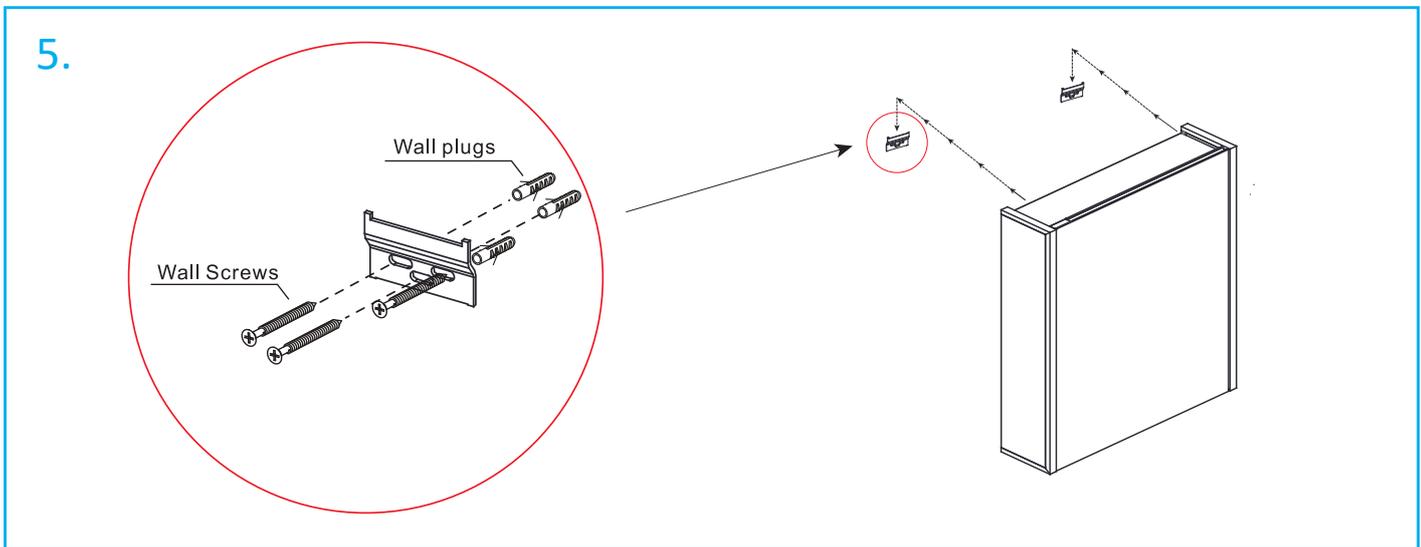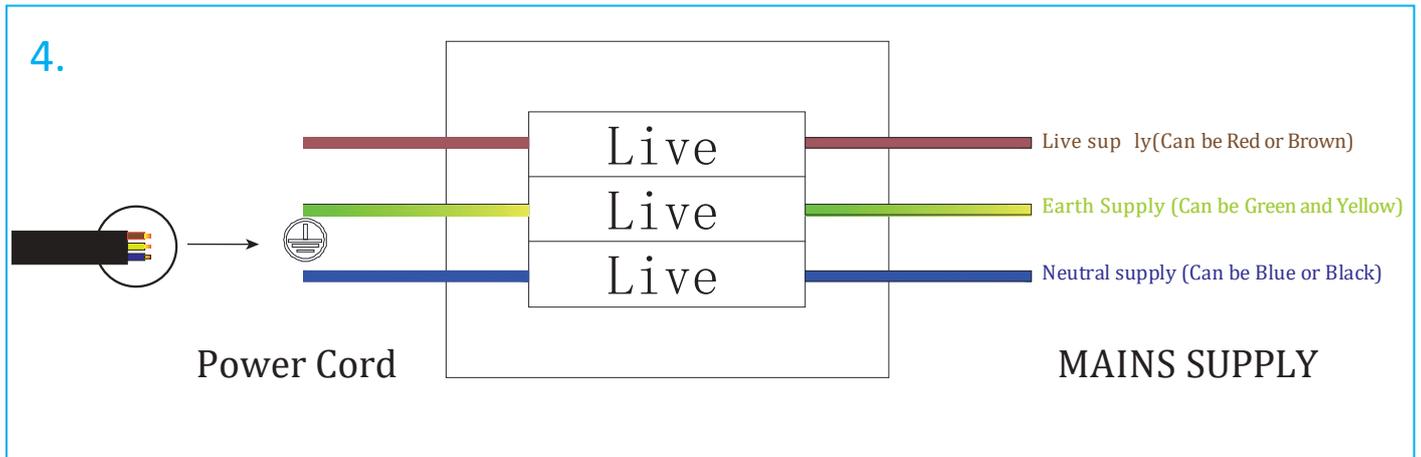

1. Make sure all the component listed are present.
2. Carefully mark the desired location for the first mounting bracket using the dimensions shown in the diagram. Mark out the location for the second bracket using the dimensions A shown in the diagram. Mark out the location for the internal securing screw using the dimensions B shown in the diagram. Once all marking are complete, proceed to drill the holes using a 8mm drill bit.
3. Connect the cable at the back of the cabinet to the mains supply. Please see the wiring diagram carefully.
Make the electrical connections ensuring first that electrical supply has been turned off. This mirror is a class 1 product and requires an earth connection. It should be installed in a accordance with the latest IEE regulations.
4. Insert the Rawl plugs into the holes and then attach the mounting brackets to the wall by inserting the screws.
Carefully position the cabinet up against the wall so that the brackets are slightly below the hook sand then gently lower the cabinet until the brackets take the weight of the cabinet.
5. Insert the internal securing screw and cover the screw cap.
6. Insert the shelves.
7. Turn on/off the light : Sweep your hand cross over the IR sensor slowly.

Caution: To avoid interference, the sensor must be placed a minimum of 150mm away from any object/surface.

<p>1. 300.20.45 300.20.46</p>  <p>To activate the Bluetooth®, operate the sensor switch located at the bottom of the mirror. The mirror will give out a tone to confirm it is ready for pairing.</p>	<p>2.</p>  <p>Activate the Bluetooth® on your device*</p>	<p>3.</p> 	<p>4.</p>  <p>You can now listen to your favorite song or on line radio station via the stereo speakers</p>
---	--	--	--

- When the mirror is turned off the connection to the Bluetooth® will be lost. When the mirror is turned on again it will automatically reconnect to the last connected device.
- Refer to your device manual for operating controls.
- Music will stop playing when a phone call comes into the Bluetooth® device, and will automatically reconnect when finished.

Trouble Shooting Guide

symptoms	possible problem	solution
Device not paired	Bluetooth® not activated	Check Bluetooth® is activated on compatible device & mirror is turned on
Device not connecting	Only one device can be connected to the mirror at any one time	Disconnect all devices and reconnect only one device
No volume	Volume is controlled from device	Increase volume on device
No connection	Out of range	Range is within 8 metres, move device closer to mirror